


Most Trusted Traveling Irrigation Systems Since 1964

Caprari Model D2/80 PTO Pump



- Compact, reliable PTO pump capable of 200 to 700 gpm with corresponding pressures of 110 to 99 psi using 28 to 51 hp
- Available with heavy duty two wheeled trailer or galvanized three point mount
- Designed with industry leading oil lubricated step up gearbox (no belts or pulleys) with shafts supported by widely spaced bearings
- Easily replaceable packing gland type water seal
- Pumps can be fitted with 4" female thread discharge priming valve, hand primer, fluid filled pressure gauge, short suction adapter with 5" female pipe thread and #6 heavy duty 1 3/8 six spline PTO shaft

Technical Specifications							
Discharge & Suction	(Bare or Pump, Cart & Shaft) Flanged						
Discharge & Suction	(Fully Fitted) 4" NPT (F) Discharge, 5" NPT (F) Suction						
Discharge Position	Horizontal, Right Facing (When Standing Behind The Suction End)						
Length	70 Inches						
Width	48 Inches						
Height	39 Inches						
Weight (Unfitted)	275 lbs.						
Weight (Fitted)	335 lbs.						
Configurations							
Bare Pump	Pump only with weld-on companion flanges, gaskets, nuts & bolts						
Pump, Cart & Shaft	Same as bare pump, but mounted on two- wheeled cart PTO drive shaft						
Fully Fitted	Sames as pump, cart & shaft plus hand primer, check valve, pressure gauge & suction fittings						
Options (Additional Fees Apply)							
Three-Point Hitch	Fully galvanized frame may be substituted for cart						
Suction Hose	5" x 30' Aquaflex						
Foot Valve & Strainer	5" Cast or Aluminum 45°						
Special Execution	Consult Factory						

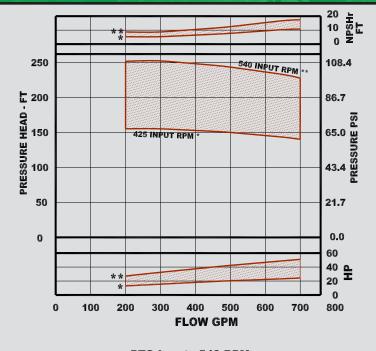

PTO Input - 540 RPM

GPM	200	300	400	500	600	700		
		109 33						

www.kifco.com



700 S. Schrader Ave. P.O. Box 290 Havana, IL 62644 800-452-7017 Toll Free 309-543-4425 Phone 309-543-4945 Fax www.kifco.com