


FCD Most Trusted Traveling Irrigation Systems Since 1964

Caprari Model D01/125 PTO Pump



- Compact, reliable PTO pump capable of 500 to 1585 gpm with corresponding pressures of 37 to 15 psi using 17 to 26 hp
- Available with heavy duty two wheeled trailer or galvanized three point mount
- Designed with industry leading oil lubricated step up gearbox (no belts or pulleys) with shafts supported by widely spaced bearings
- Easily replaceable packing gland type water seal
- Pumps can be fitted with 5" female thread discharge priming valve, hand primer, fluid filled pressure gauge, short suction adapter with 8" female pipe thread and #6 heavy duty 1 3/8 six spline PTO shaft

Technical Specifications							
Discharge & Suction	(Bare or Pump, Cart & Shaft) Flanged						
Discharge & Suction	(Fully Fitted) 5" NPT (F) Discharge 8" NPT (F) Suction						
Execution	Horizontal, Right Facing (When Standing Behind The Suction End)						
Length	70 Inches						
Width	54 Inches						
Height	38 Inches						
Weight (Unfitted)	430 lbs.						
Weight (Fitted)	500 lbs.						
Configurations							
Bare Pump	Pump only with weld-on companion flanges, gaskets, nuts & bolts						
Pump, Cart & Shaft	Same as bare pump, but mounted on two- wheeled cart & PTO drive shaft						
Fully Fitted	Sames as pump, cart & shaft plus hand primer, check valve, pressure gauge and suction fittings						
Options (Additional Fees Apply)							
Three-Point Hitch	Fully galvanized frame may be substi- tuted for cart						
Suction Hose	8" x 25' Aquaflex						
Foot Valves & Strainers	8" Cast or Aluminum 45°						
Special Execution	Consult Factory						

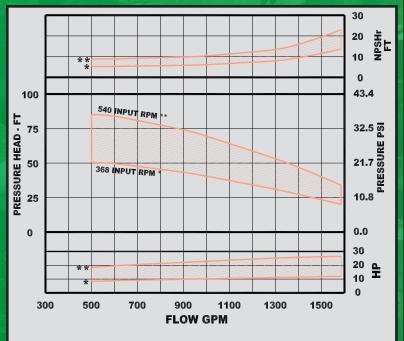

PTO Input - 540 RPM								
GPM	500	700	900	1100	1300	1585		
PSI	37	35	32	28	23	15		
HP	17	21	22	23	25	26		

b) performance information contained interims based on based on based on based on based on based of the performance in the second performance is a facted of, but not initial is location, operating conditions (temperature, humidity & altitude) and human judgment. Krico Inc. reserves the right to change odduct specifications, designs, pricing and standard equipment without notice and without incurring obligation.

Ag-Rain®

KIFCO

Water-Reels®

Specialty

Pumps

B-Series

www.kifco.com

700 S. Schrader Ave. P.O. Box 290 Havana, IL 62644 800-452-7017 Toll Free 309-543-4425 Phone 309-543-4945 Fax www.kifco.com